CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

This Mitigation Inspection Form must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This Inspection Form is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

WIND LOSS MI	IIIGA	TION INFORMATION					
PREMISES #:		SUBJECT OF INSURANCE: Beach Walk East Condominium Association, Inc.POLICY #:					
BUILDING #:	3201	STREET ADDRESS: 3201 S. Ocean Blvd Highland Beach, FL 33487					
# STORIES:	12	BLDG DESCRIPTION: 3201 S. Ocean Blvd					
BUILDING TYPE:							
Terrain Expo	sure C	Category must be provided for each insured location.					
		e building or unit at the address indicated above TERRAIN EXPOSURE CATEGORY as defined under the s (Check One): X Exposure C or Exposure B					
Certification below for purposes of TERRAIN EXPOSURE CATEGORY above does not require personal inspection of the premises.							
Certification of Built On or After		Id Speed is required to establish the basic wind speed of the location (Complete for Terrain B only if Year 2002).					
		the basic WIND SPEED of the building or unit at the address indicated above based upon county wind der the Florida Building Code (FBC) is (Check One): ☐ ≥100 or ☐ ≥110 or ☒ ≥120					
Certification of Wind Design is required when the buildings is constructed in a manner to exceed the basic wind speed design established for the structure location (Complete for Terrain B only if Year Built On or After Jan.1, 2002).							
		the building or unit at the address indicated above is designed and mitigated to the Florida Building Code I of (Check One):					
	Certification for the purpose of establishing the basic WIND SPEED or WIND SPEED DESIGN above does not require personal inspection of the premises.						
Specify the type o	f mitic	gation device(s) installed:					
accompany this for	m. At	ion used in validating the compliance or existence of each construction or mitigation attribute mus least one photo documenting the existence of each visible and accessible construction or mitigation is 1 through 4 must accompany this form.					

1.	Ro	oof Coverings					
Roof Covering Material:		aterial:	Date of Installation: 2006 (RF-21947, 5/15/2006)				
		Level A (Non FBC Equivalent) – T	Type II or III The the FBC Equivalent definition requirements below.				
	X	∠ Level B (FBC Equivalent) – Type II or III					
		Single-Ply, Modified Bitumen, Sprayed Polyurethane foam, Metal, Tile, Built-up, Asphalt Shingle or Rolled Roofi other roof covering membranes/products that at a minimum meet the 2001 or later Florida Building Code or the South Florida Building Code and have a Miami-Dade NOA or FBC 2001 Product Approval listing that is/was cat the time of installation.					
		winds. Any flat roof covering with flashin	uately tied to the roof deck to resist overturning and sliding during high g or coping must be mechanically attached to the structure with face sphalt roof coverings on flat roofs must be 10 years old or less.				

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

2.						
1	Roof	Roof Deck Attachment				
	Level A – Wood or Other Deck Type II only					
	Roof deck composed of sheets of structural panels (plywood or OSB).					
		Or Architectural (non-structural) metal panels that require a solid decking to support weight and loads.				
	Or					
	1	Other roof decks that do not meet Levels B or C below.				
		Level B – Metal Deck Type II or III				
		Metal roof deck made of structural panels fastened to open-web steel bar joists and integrally attached to the wall.				
	∠ Level C – Reinforced Concrete Roof Deck Type, II or III					
	A roof structure composed of cast-in-place or pre-cast structural concrete designed to integrally attached to wall/support system.					
3.	Seco	ondary Water Resistance N/A				
		Underlayment A self-adhering polymer modified bitumen roofing underlayment (min rubber sheets with peel and				
		stick underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located beneath the roof covering and normal felt underside located located beneath the roof covering and normal felt underside located locate				
		the requirements of ASTM D 1970 installed over all plane down all plane down to protect from water intrusion. All secondary water resistance products must be installed for the manufacturer's recommendations. Roofing felt or similar paper				
		based products are not acceptable for secondary water resistance.				
		Foamed Adhesive				
		A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water				
		intrusion.				
_						
4.	Ope	ning Protection				
4.	_					
4.	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant				
4.	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:				
4.	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12;				
4.	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996;				
4.	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203;				
4.	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996;				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203.				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard.				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard.				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc)				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant				
4.		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of:				
4.		Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of: ASTM E 1886 and ASTM E 1996 All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All				
4.		Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of: ASTM E 1886 and ASTM E 1996				

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

CERTIFICATION

I certify that I hold a	n active license as a: (C	HECK ONE OF THE FOLLOW	(ING)							
☐ General or building contractor licensed under Section 489.111, Florida Statutes.										
☐ Building code ins	☐ Building code inspector certified under Section 468.607, Florida Statutes.									
☐ Professional architect licensed under Section 481.213, Florida Statutes.										
☑ Professional engineer licensed under Section 471.015, Florida Statutes.										
I also certify that I personally inspected the premises at the Location Address listed above on the inspection date provided on this Mitigation Inspection Form. In my professional opinion, based on my knowledge, information and belief, I certify that the above statements are true and correct.										
This Mitigation Inspection Form and the information set forth in it are provided solely for the purpose of verifying that certain structural or physical characteristics exist at the Location Address listed above and for the purpose of permitting the Named Insured to receive a property insurance premium discount on insurance provided by Citizens Property Insurance Corporation and for no other purpose. The undersigned does not make a health or safety certification or warranty, express or implied, of any kind, and nothing in this Form shall be construed to impose on the undersigned or on any entity to which the undersigned is affiliated any liability or obligation of any nature to the named insured or to any other person or entity.										
Name of Company:	Name of Company: David Cliff, PE for Don Meyler Inspections		Phone:	(954) 749-7099						
Name of Inspector	David Cliff, PE	License Type	License #	P.E.52211						
Inspection Date:	5/19/2020									
Signature:	David Off		Date:	5/19/2020						
Applicant /Insured's Signature *:			Date:	5/19/2020						
		Board President and another dinsured for all other business e		board for condo and						
		ijure, defraud, or deceive any i eading information is guilty of a f								

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.











Left




Right















Reinforced Concrete Roof Deck



Impact Glass

Impact Glass










Impact Glass

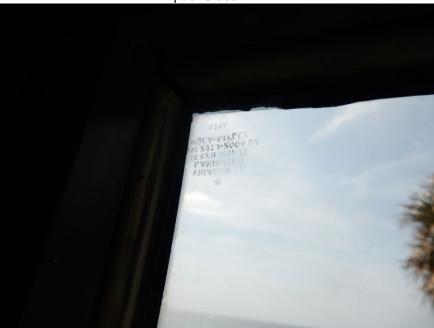

Impact Glass



Impact Glass


Impact Glass




Inspection Photos


3201 S. Ocean Blvd



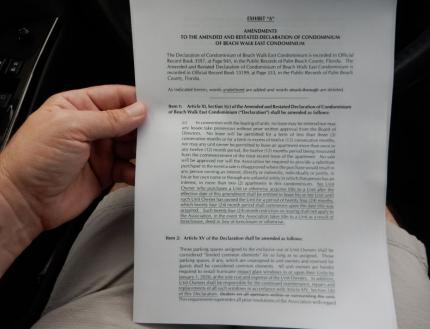

Impact Glass Documentation

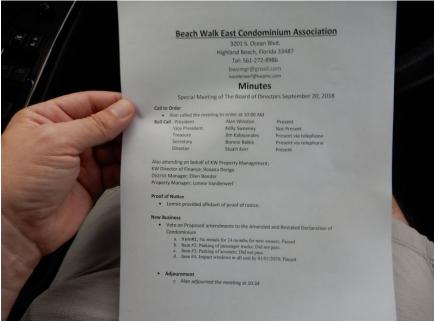

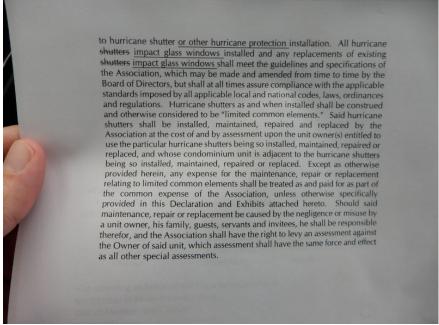

Impact Glass Documentation

w Business

- Vote on Proposed amendments to the Amended and Restated I Condominium
 - a. Item#1; No rentals for 24 months for new owners; Passed
 - b. Item #2; Parking of passenger trucks; Did not pass.
 - c. Item #3; Parking of scooters; Did not pass.
 - d. Item #4; Impact windows in all unit by 01/01/2020; Passed
 - Adjournment
 - Alan adjourned the meeting at 10:34

Impact Glass Documentation





Don Meyler Inspections





Pool Side





Impact Rated Accordion Shutter Label

Impact Rated Accordion Shutters







Built-Up Tar & Gravel Roof Covering



Built-Up Tar & Gravel Roof Covering